

客户 Customer: _____

日期 DATE: _____

纳入仕様书 SPECIFICATION

产品名称 PRODUCT NAME: 声表滤波器

SAW Filter

贵司料号 YOUR PART NO.:

敝司料号 OUR PART NO.: MS11U1G96-RX02S

版本号 VERSION.: V1.8

接受 RECEPTION

THE SPECIFICATION HAS BEEN ACCEPTED.

该纳入仕様书已被我司接受

日期:
DATE:

公司:
COMPANY:

批准
CFMD

审核
CHKD

接收
RCVD

深圳市麦捷微电子科技股份有限公司
SHENZHEN MICROGATE TECHNOLOGY CO., LTD
TEL: 86-755-28085000
FAX: 86-755-28085605

CFMD. 批准	CHKD. 审核	DSGD. 担当
赵拥军	赖定权	赵新佳

深圳市麦捷微电子科技股份有限公司
地址: 深圳市坪山区龙田街道竹坑社区科技路麦捷科技智慧园
电话(Tel): 0755-28085000 传真(Fax): 0755-28085605

邮编(Postcode): 518110

纳入仕様书改定履历

MODIFY HISTORY OF SPECIFICATION

NO.	修改日期/DATE	修改内容/CONTENT	批准/APPROVED
1.0	2015.08.21	初稿 /New Released	梁启新
1.1	2017.09.25	添加湿度敏感等级规格/Add Moisture Sensitivity Level	梁启新
1.2	2018.09.26	版本升级/Version Upgrade	姚艳龙
1.3	2018.12.16	版本升级/Version Upgrade	姚艳龙
1.4	2019.05.08	版本升级/Version Upgrade	姚艳龙
1.5	2021.09.23	版本升级/Version Upgrade	赵拥军
1.6	2021.11.22	版本升级/Version Upgrade	赵拥军
1.7	2022.04.09	版本升级/Version Upgrade	赵拥军
1.8	2022.05.17	版本升级/Version Upgrade	赵拥军

目录 CATALOG

1 适用范围 Scope.....	4
2 品名构成 Product Identification.....	4
3 尺寸和管脚定义 Dimensions and PIN Configurations.....	4
4 推荐焊盘与测试电路 Recommended Land Pattern and Test Circuit.....	5
5 电气性能 Electrical Characteristics.....	5
6 包装 Packaging.....	8
7 装箱清单及标志 Packing documents and marking.....	9
8 保管 Storage.....	11

1 适用范围 Scope

麦捷声表滤波器系列产品设计用于 WIFI、GPS、移动电话和无绳电话机等相关市场中。

Microgate SAW Component is applicable for WIFI/GPS/Mobile phone/Cordless phone relevant market.


2 品名构成 Product Identification

MS 11 U 1G96 - RX 02 S
① ② ③ ④ ⑤ ⑥ ⑦

- ① 麦捷声表滤波器/Microgate SAW
- ② 尺寸/Size: (20-2016, 18-1814,15-1511,14-1411, 11-1109)
- ③ 输出/Output: (B-Balance out, U-Unbalance out)
- ④ 频率/Frequency: (1G96-1.96GHz)
- ⑤ 型号/Type: (QP-QPX,DU-Duplexer, DI-Diplexer, TX-TX SAW, RX-RX SAW)
- ⑥ 频段/Band: (02-Band2)
- ⑦ 流水号/Serial number

3 尺寸和管脚定义 Dimensions and PIN Configurations

Unit:mm

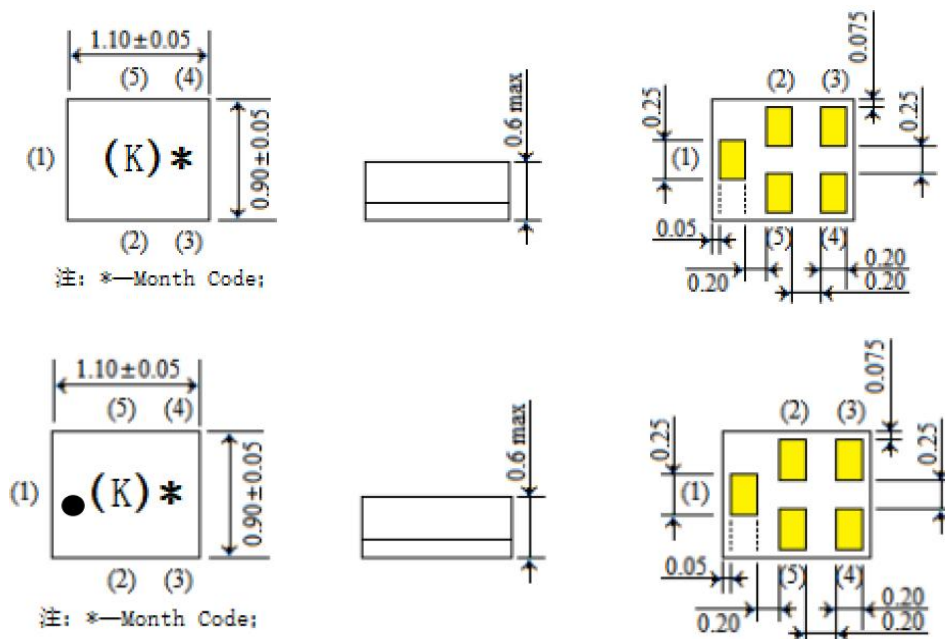

PIN NO.	(1)	(2)	(3)	(4)	(5)
PIN Name	Input	GND	GND	Output	GND

深圳市麦捷微电子科技股份有限公司

地址: 深圳市坪山区龙田街道竹坑社区科技路麦捷科技智慧园

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518110



4 推荐焊盘与测试电路 Recommended Land Pattern and Test Circuit

Land Pattern

Test Circuit

Unit:mm

Bottom View

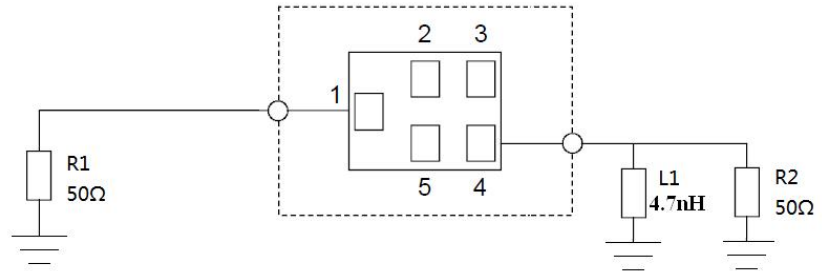

5 电气性能 Electrical Characteristics

操作温度范围 Operating Temperature Range : -20 to +85°C

保存温度范围 Storage Temperature Range : -40 to +85°C

测试温度范围 Test Temperature: 25°C±2°C

湿度敏感等级 Moisture Sensitivity Level: MSL 2a

静电敏感等级 Electrostatic Discharge(ESD) Sensitivity: 250V (Human Body Model)

端口电压 D.C. Volatage between the terminals: 3V (25°C±2°C)

Table1. Electrical Specification

No.	Item	Frequency (MHz)	Specification				
			Min	Max	Typ.	Unit	
1	ANT to Rx	Insertion Loss	1930~1990		2.5	1.7	dB
2		Ripple Deviation	1930~1990		1.8	0.9	dB
3	Absolute Attenuation	DC~960	38		41		dB
4		1558~1608	35		36		dB
5		1710~1850	35		37		dB
6		1850~1910	32		39		dB
7		2020~2070	7		27		dB
8		2070~2400	25		33		dB
9		2400~2500	33		39		dB
10		2500~3780	28		37		dB
11		3780~3980	30		40		dB
12		3980~5790	21		34		dB
13		5790~5970	21		34		dB
14		5970~7720	21		23		dB
15		7720~7960	17		23		dB
16		7960~8000	17		23		dB
17	VSWR	1930~1990(Input)		2.1	1.5		
18		1930~1990(Output)		2.1	1.5		
19	Input Signal Level	Max: +15 dBm CW , 5000 h(55°C)					

深圳市麦捷微电子科技股份有限公司

地址: 深圳市坪山区龙田街道竹坑社区科技路麦捷科技智慧园



电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518110

Frequency Performance

Frequency Response

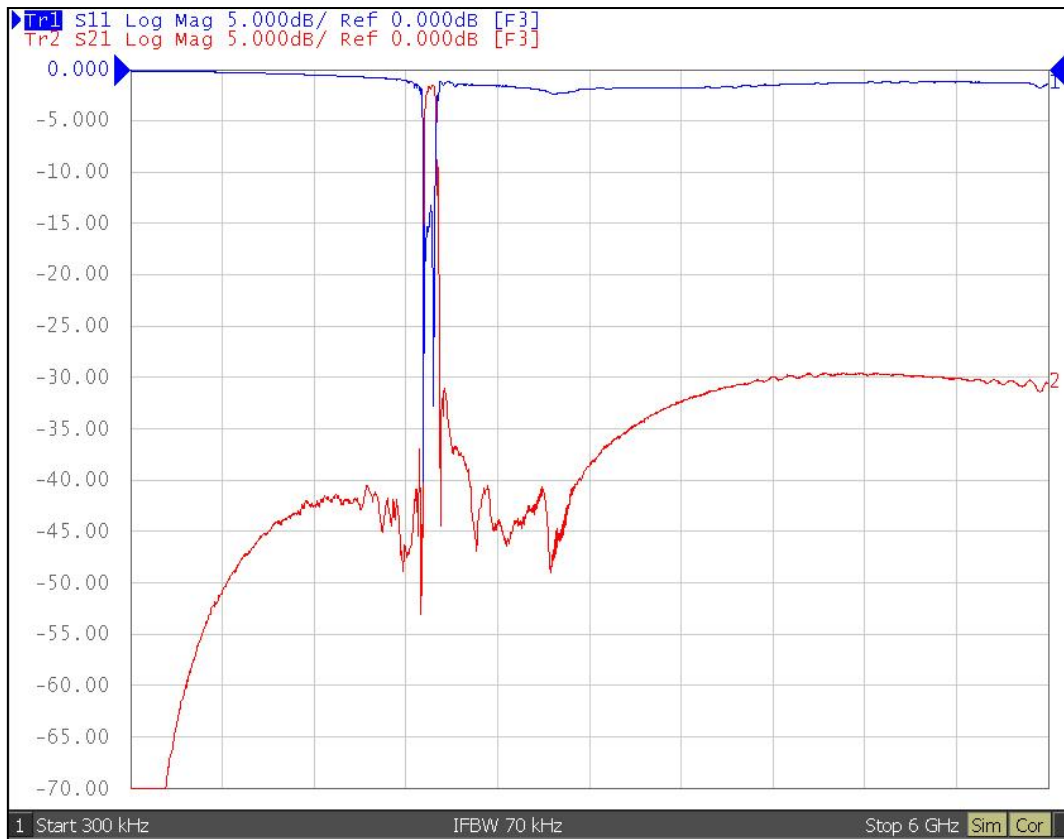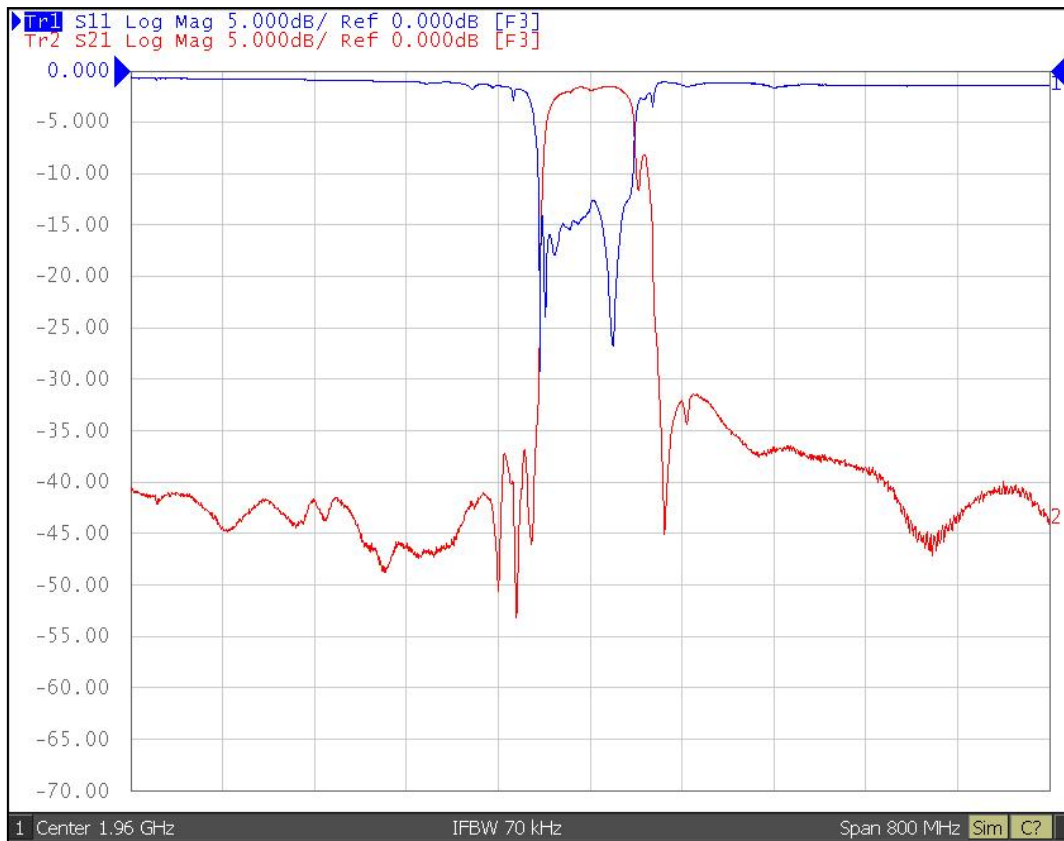

深圳市麦捷微电子科技股份有限公司


地址：深圳市坪山区龙田街道竹坑社区科技路麦捷科技智慧园

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605


邮编(Postcode): 518110

VSWR

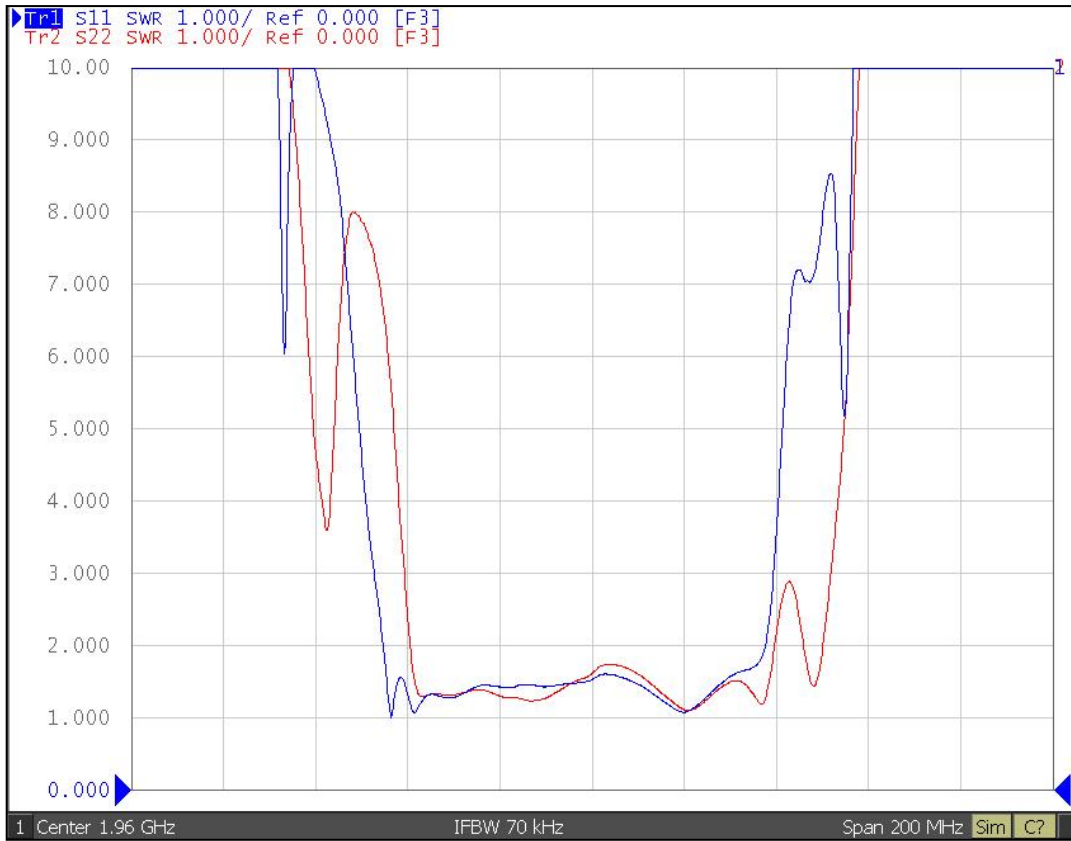


6 包装 Packaging

① 编带尺寸 Dimensions of Tape:

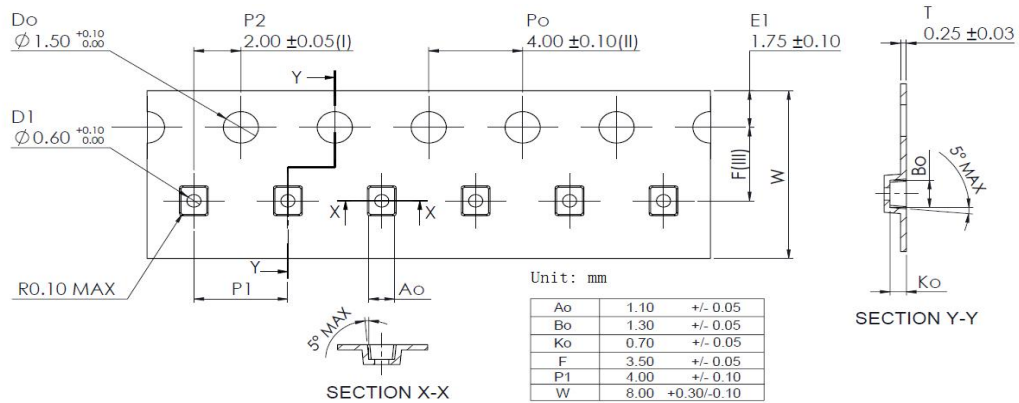

② 带轮尺寸 Dimensions of Reel


Unit: mm




A	178±2
B	60±2
C	13.0±0.5
D	21.0±0.8
E	2.0±0.5
W	8.5±1.0
t	1.2±0.2
R	1.0±0.25

Reel material: PS (Polystyrene)

③ 编带简图及拉伸方向 Taping figure and drawing direction:

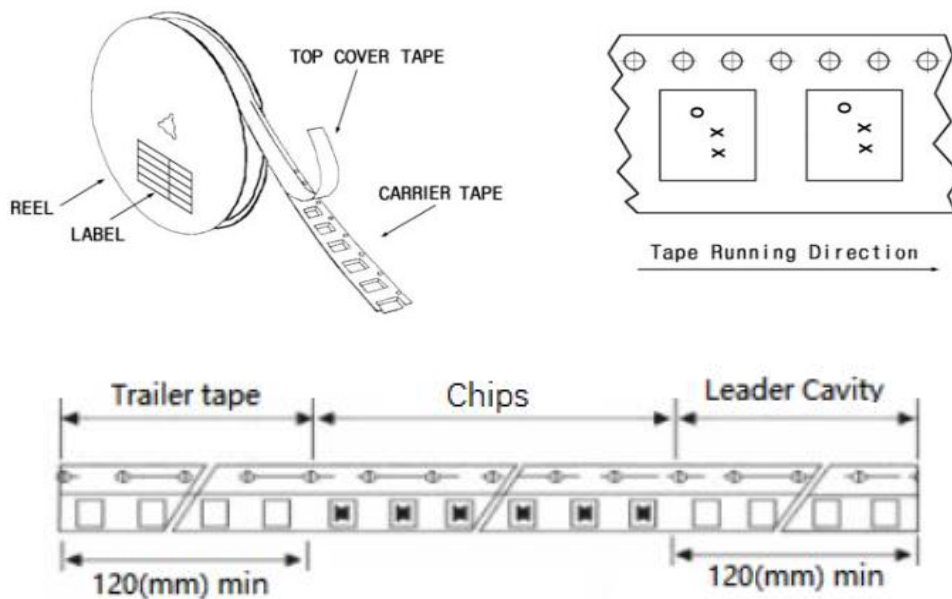

④ 盖带的剥离强度 Peeling strength of cover tape:

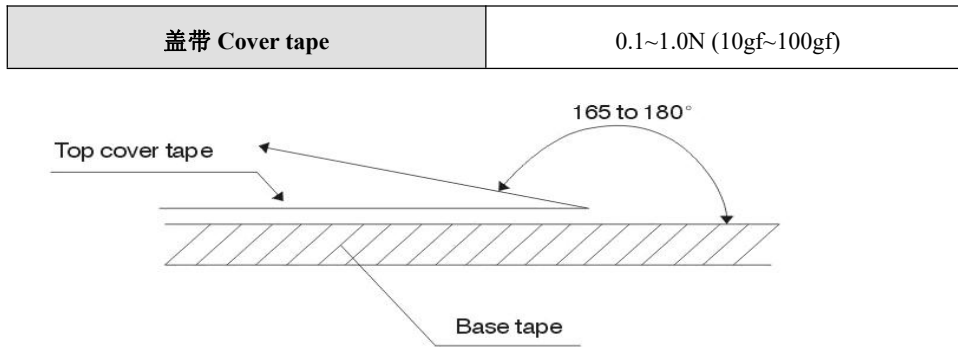

测试条件 Test condition:

- 1) 剥离角度 peel angle: 165°~180° vs. carrier tape.
- 2) 剥离速度 peel speed: 300mm/min±10%.

⑤ 包装数量 Packaging quantities: 5000 PCS / Reel


7 装箱清单及标志 Packing documents and marking

① 包装文件 Packing documents

- a. 装箱清单 Packing list.
- b. 合格证书 Certificate of compliance.

② 盘上标记 Marking on reels:

- a. 麦捷料号 MICROGATE Part No.
- b. 生产批号 Lot number
- c. 盘装数量 Quantity per reel
- d. 检验员号 Inspector No.

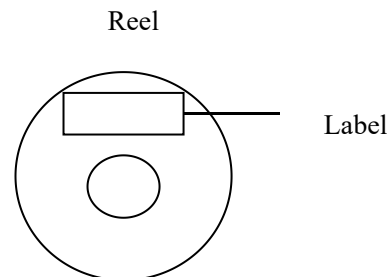

以上内容必须在标签上注明. All above shall be shown on marking label

麦捷公司标签如下所示: MICROGATE marking label will be as following:

MICROGATE		
CUSTOMER:	P. O. NO	
CUSTOMER PART NO:	DATE CODE	LOT NO
MG PART NO:	QUANTITY	INSP. NO

MG PART NO

深圳市麦捷微电子科技股份有限公司


地址: 深圳市坪山区龙田街道竹坑社区科技路麦捷科技智慧园

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518110

检验合格后, 检验员在标签上盖上合格章。合格章如下所示: The eligible reels will be pressed a mark onto the surface. The mark will be as following:

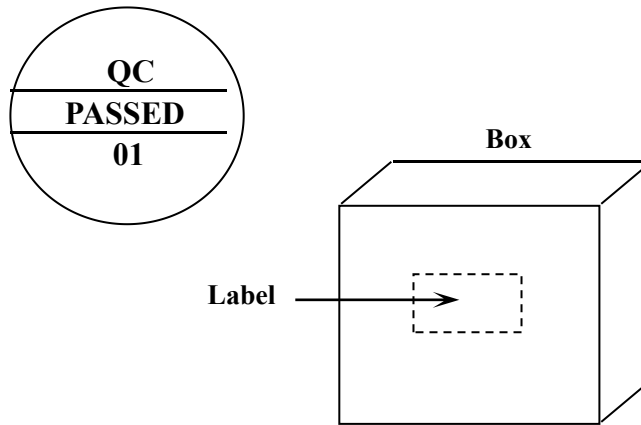


③ 内包装盒标记: Marking on inner box

- a. 型号 MICROGATE part No.
- b. 每盒数量 Quantity per box
- c. 包装日期 Date

以上内容必须在标签上注明 (标签见 7.2 所示)。Above shall be shown on marking label (The marking label is shown in item 7.2).

④ 外包装箱标记 Marking on outer case:

- 1) 制造商 Manufacturer: “MICROGATE” ①
“中国深圳制造” “Made in Shenzhen CHINA” ②
- 2) 发运标记 Ship marking:
“向上” “UP”, “小心轻放” “HAND CARE”, “防潮” “MOISTURE-PROOF”.
- 3) 包装标签包括以下内容 Packing label include the following:
 - a. 型号 MICROGATE Part No
 - b. 总数量 Total quantity per case
 - c. 包装日期 Date;

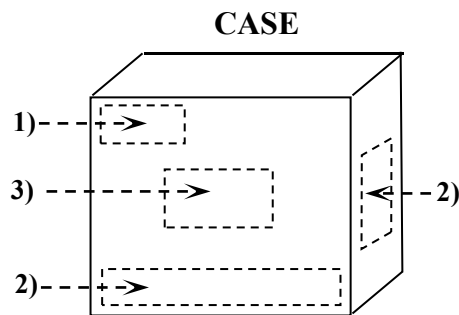

以上内容必须在标签上注明。(参见 7.2 所示)

All above shall be shown on marking label. (The marking label is shown in item 7.2)

8 保管 Storage

保存条件 Storage conditions

- 存放货物的库房应满足以下条件 Products should be storage in the warehouse on the following conditions

温度 Temperature: $\leq 40^{\circ}\text{C}$

湿度 Humidity : $\leq 70\%$ relative humidity

不允许温、湿度有极剧变化。No rapid change on temperature and humidity

- 禁止将产品保管在腐蚀性物质中，例如硫磺、氯气或者酸，否则将引起端头氧化，导致降低焊接性。

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solder ability.

- 为了避免受潮气、灰尘等物质的影响，产品应保管于货架上。Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.

- 产品保管在库房中时，应避免热冲击，振动以及直接光照等等。Products should be storage in the warehouse without heat shock, vibration, and direct sunlight and so on.

- 产品应密封包装 Products should be storage under the airtight packaged condition.