

CUSTOMER: _____

DATE: _____

APPROVAL SPECIFICATION



PRODUCT NAME: SMD power inductor

YOUR PART NO.:

OUR PART NO.: AMPIT3015 Series

VERSION: V1.0

| | | |
|---|-------------|--------------|
| RECEPTION THE SPECIFICATION HAS BEEN ACCEPTED. | | |
| COMPANY: | | DATE: |
| CFMD | CHKD | RCVD |

MANUFACTURING NAME

SHENZHEN MICROGATE TECHNOLOGY CO. , LTD
 Address: Microgate Smart Park, Technology Road,
 Zhukeng Community, Longtian Street, Pingshan
 District, Shenzhen.
 Postcode: 518122
 TEL: 86-755-28085000
 FAX: 86-755-28085605

| | | |
|-------|-----------------|---------|
| CFMD. | CHKD. | DSGD. |
| Remo | Hongpei Ding | Wei Liu |

CATALOG

| | | |
|-----------|---|------------|
| | Component SPEC Version Record..... | 3 |
| 1 | Scope..... | 4 |
| 2 | Product Identification..... | 4 |
| 3 | Appearance, Dimensions and Material..... | 4 |
| 4 | Testing Conditions..... | 5 |
| 5 | Electrical Characteristics..... | 5 |
| 6 | Reliability..... | 6-8 |
| 7 | Recommended Soldering Condition..... | 9 |
| 8 | Packaging..... | 10 |
| 9 | Visual inspection standard of product..... | 11 |
| 10 | Products Storage..... | 11 |

Confidential for Microgate

Component SPEC Version Record

| Rev. | Effective Date | Changed Contents | Change Reasons | Approved By |
|------|----------------|------------------|----------------|-------------|
| V1.0 | 2019.12.08 | New released | / | Remo |
| | | | | |

Confidential for Microgate

1. Scope

This specification applies to the AMPIT3015 series of SMD Power inductors.


2. Product Identification

AMPIT 3015 - 1R0 M - LF
① ② ③ ④ ⑤

- ① Product Symbol (Automotive electronics products)
- ② Dimensions
- ③ Inductance Value (1R0:1.0uH 100: 10uH)
- ④ Inductance Tolerance (K:10% ; M:20% ; N:30%)
- ⑤ Lead-Free


3. Appearance, Dimensions and Material

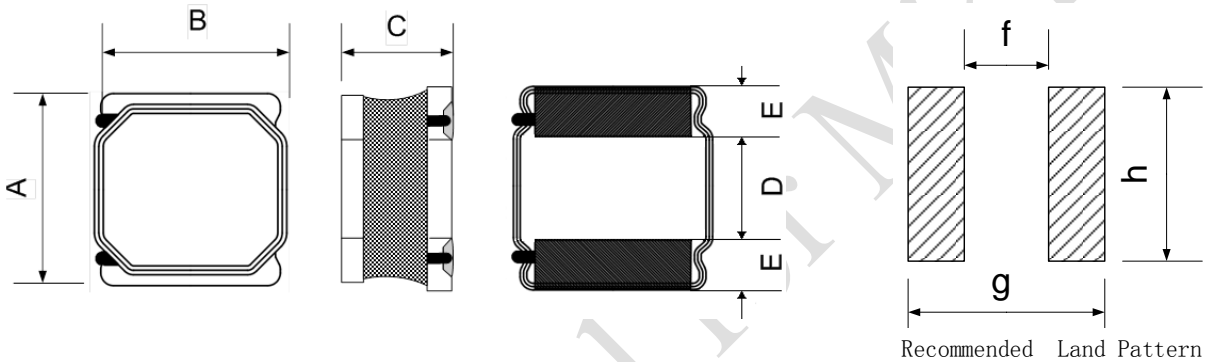3.1 Appearance and dimensions



| Dimensions in mm | | | | | | | |
|------------------|---------|-----------|---------|----------|---------|----------|----------|
| A | B | C | D | E | f | g | h |
| 3.0±0.2 | 3.0±0.2 | 1.50 Max. | 1.2±0.2 | 0.90±0.2 | 1.2Typ. | 3.1 Typ. | 2.7 Typ. |

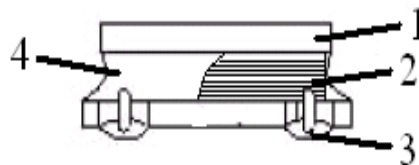3.2 Material List



| No. | Item | Material |
|-----|--------------------|---------------------------------|
| 1 | Core | Ni-Zn Ferrite |
| 2 | Wire | Enameled Copper Wire |
| 3 | Terminal Electrode | Ag/Ni/Sn/Cu |
| 4 | Magnetic Glue | Epoxy resin and magnetic powder |

SHENZHEN MICROGATE TECHNOLOGY CO., LTD.

Add: Microgate Smart Park, Technology Road, Zhukeng Community, Longtian Street, Pingshan District, Shenzhen.

Tel: +86-755-28085000 Fax: +86-755-28085605 Postcode: 518122

4. Testing Conditions

Unless otherwise specified, the standard conditions for measurement/test as:

Ambient Temperature : 5 to 35°C
Relative Humidity: 25 to 85% RH
Atmospheric Pressure: 86 to 106 kPa

If any doubt on the results, measurements/tests should be made within the following limits:

Ambient Temperature : 25±1°C
Relative Humidity: 60 to 70% RH
Atmospheric Pressure: 86 to 106 kPa





5. Electrical Characteristics And Test Instruments



| Microgate Part No. | Inductance L (uH) 100KHz/1V | DCR(Ω) | | Isat ¹ (A) | | Irms ² (A) | |
|--------------------|-----------------------------------|--------|-------|--------------------------|------|--------------------------|------|
| | | Max. | Typ. | Max. | Typ. | Max. | Typ. |
| AMPIT3015-1R0M-LF | 1.0±20% | 0.040 | 0.030 | 2.65 | 2.80 | 2.65 | 2.85 |
| AMPIT3015-1R5M-LF | 1.5±20% | 0.055 | 0.045 | 2.55 | 2.75 | 2.30 | 2.60 |
| AMPIT3015-2R2M-LF | 2.2±20% | 0.072 | 0.060 | 1.95 | 2.10 | 2.10 | 2.25 |
| AMPIT3015-3R3M-LF | 3.3±20% | 0.102 | 0.085 | 1.65 | 1.75 | 1.75 | 1.85 |
| AMPIT3015-4R7M-LF | 4.7±20% | 0.145 | 0.120 | 1.35 | 1.45 | 1.40 | 1.50 |
| AMPIT3015-6R8M-LF | 6.8±20% | 0.200 | 0.170 | 1.00 | 1.15 | 1.20 | 1.30 |
| AMPIT3015-100M-LF | 10±20% | 0.300 | 0.250 | 0.85 | 1.00 | 1.00 | 1.05 |
| AMPIT3015-120M-LF | 12±20% | 0.300 | 0.250 | 0.75 | 0.85 | 1.00 | 1.05 |
| AMPIT3015-150M-LF | 15±20% | 0.420 | 0.350 | 0.70 | 0.80 | 0.85 | 0.95 |
| AMPIT3015-220M-LF | 22±20% | 0.545 | 0.440 | 0.55 | 0.65 | 0.75 | 0.85 |
| AMPIT3015-470M-LF | 47±20% | 1.200 | 1.000 | 0.40 | 0.45 | 0.50 | 0.55 |

Test instruments and remarks

- * All test data is referenced to 25°C ambient.
- * L test by CHROMA 3302 meter or equivalent.
- * DCR test by Tonghui TH2516B meter or equivalent.
- * CHROMA 3302 and 1320 meter for IDC.
- * Isat: DC current (A) that will cause L0 to drop approximately 30%.
- * Irms: DC current (A) that will cause an temperature rise Δ T approximate to 40°C.
- * The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- * Operating temperature: -40°C to +125°C(Including self-heating)
- * The part temperature (ambient + temp rise) should not exceed 125°C under worse case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

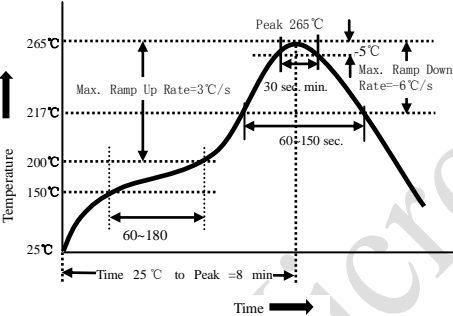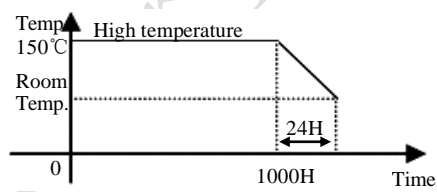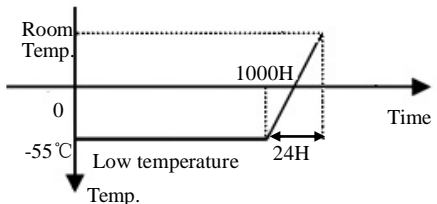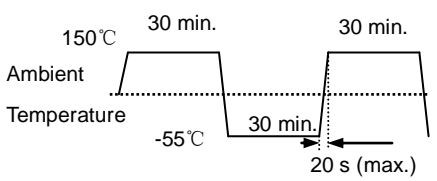6. Reliability

| No. | Item | Requirements | Test Methods and Remarks | Reference | Sample Size |
|-----|------------------------------|--|--|-----------------------------------|-------------|
| 1 | Solderability | (1) Terminal area shall be at least 95% covered. | ①Temperature: $240 \pm 5^\circ\text{C}$, flux 5-10 s. ②Sample immersion tin furnace $3 \pm 1\text{s}$. ③Sn/3.0Ag/0.5Cu | AEC-Q200 (J-STD-002) | 15 |
| 2 | Resistance to Soldering Heat | (1) No case deformation or change in appearance. (2) $ \Delta L_0/L_0 \leq 10\%$ | ①The peak temperature: $260 + 5/-0^\circ\text{C}$. ②Reflow: 3 times. ③Temperature curve is as below:  | AEC-Q200 (MIL-STD-202 Method 210) | 30 |
| 3 | High Temperature Storage | (1) No case deformation or change in appearance. (2) $ \Delta L_0/L_0 \leq 10\%$ | ①Temperature: $150 \pm 2^\circ\text{C}$. ②Time : 1000(+48,0) hours. ③Measurement at 24 ± 4 hours after test conclusion.  | AEC-Q200 (MIL-STD-202 Method 108) | 77 |
| 4 | Low Temperature Storage | (1) No case deformation or change in appearance. (2) $ \Delta L_0/L_0 \leq 10\%$ | ①Temperature: $-55 \pm 2^\circ\text{C}$. ②Time : 1000(+48,0) hours. ③Measurement at 24 ± 4 hours after test conclusion.  | | |
| 5 | Temperature Cycling | (1) No case deformation or change in appearance. (2) $ \Delta L_0/L_0 \leq 10\%$ | ①First -55°C for 30 minutes, last 150°C 30 minutes as 1 cycle. Go through 1000 cycles.. ②Max transfer time is 20 second. ③Measurement at 24 ± 4 hours after test conclusion.  | AEC-Q200 (JESD22-A104) | 77 |
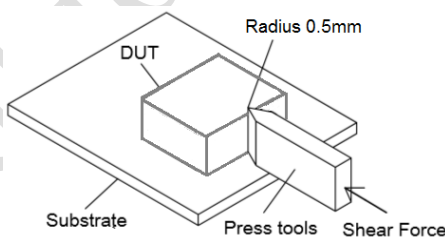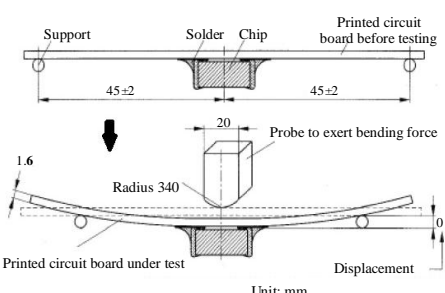
| No. | Item | Requirements | Test Methods and Remarks | Reference | Sample Size |
|-----|------------------------|--|--|------------------------------------|-------------|
| 6 | Resistance to Solvents | (1) No case deformation or change in appearance. (2) $ \Delta L_0/L_0 \leq 10\%$ | ①Prepare solvent (isopropyl alcohol: kerosene: ethylbenzene =4:9:3 volume) ②Specimen be completely immersed in solvent for 3+0.5/-0min ③Brush dipped in solution until wetted and brush part 10 strokes . ④Repeat 2 more times, Air blow dry. ⑤Inspect at 3x magnifier for marking and 10x for part damage. Note: Add Aqueous wash chemical. OKEM Clean or equivalent. Do not use banned solvents. | AEC-Q200 (MIL-STD-202 Method 215) | 15 |
| 7 | ESD | (1) No case deformation or change in appearance. (2) $ \Delta L_0/L_0 \leq 10\%$ | ①HBM ESD discharge waveform,8KV | AEC-Q200 (AEC-Q200-002) | 15 |
| 8 | Biased Humidity | (1) No case deformation or change in appearance. (2) $ \Delta L_0/L_0 \leq 10\%$ | ①1000(+48,0) hours, 85 °C/85% RH. ②Unpowered. ③Measurement at 24±4 hours after test conclusion. | AEC-Q200 (MIL-STD -202 Method 103) | 77 |
| 9 | Terminal Strength | (1) No case deformation or change in appearance. (2) $ \Delta L_0/L_0 \leq 10\%$ | ①The test samples shall be soldered to the board. ②17.64N, 60±1s  | AEC-Q200 (AEC-Q200-006) | 30 |
| 10 | Board Flex | (1) No case deformation or change in appearance. (2) $ \Delta L_0/L_0 \leq 10\%$ | ①Part mounted on a 100mm*40mm FR4 PCB board, which is 1.6±0.2 mm thick and as a Layer-thickness 35 μm ± 10 μm. ②Bending speed is 1mm/s. ③Keeping the P.C Board 2 mm minimum for 60 seconds.  | AEC-Q200 (AEC-Q200-005) | 30 |


| No. | Item | Requirements | Test Methods and Remarks | Reference | Sample Size |
|-----|-------------------------------|--|--|-----------------------------------|-------------|
| 11 | Vibration | (1) No case deformation or change in appearance. (2) $ \Delta L0/L0 \leq 10\%$ | ①Frequency range : 10~2000Hz. ②Amplitude: 1.5mm ,5g. ③Sweep time and duration: 10~2000~10Hz for 20 minutes. ④Each four hours(12 times) in X,Y,Z direction, 12 hours in total. | AEC-Q200 (MIL-STD-202 Method 204) | 30 |
| 12 | Mechanical Shock | (1) No case deformation or change in appearance. (2) $ \Delta L0/L0 \leq 10\%$ | Half sine shock pulse,100g,6ms,6 shocks in each 3 mutually perpendicular directions (total of 18 shocks) | AEC-Q200 (MIL-STD-202 Method 213) | 30 |
| 13 | Loading at High Temperature | (1) No case deformation or change in appearance. (2) $ \Delta L0/L0 \leq 10\%$ | ①Temperature: 150±2℃. ②Time : 1000 (+48,0) hours. ③Applied Current : Rated current. ④Measurement at 24±4 hours after test conclusion. | AEC-Q200 (MIL-PRF-27) | 77 |
| 14 | Loading at Damp Heat | (1) No case deformation or change in appearance. (2) $ \Delta L0/L0 \leq 10\%$ | ①Temperature: 60±2℃, Humidity: 90% to 95% RH. ②Time : 1000 (+48,0) hours. ③Applied Current : Rated current. ④Measurement at 24±4 hours after test conclusion. | AEC-Q200 | 77 |
| 15 | Drop | (1) No case deformation or change in appearance. (2) $ \Delta L0/L0 \leq 10\%$ | ①Height: 1 m, Free fall, 10times. ②Direction: 1 Angle, 1side, 2surface. | AEC-Q200 | 30 |
| 16 | Flammability (External Flame) | (1) No case deformation or change in appearance. (2) $ \Delta L0/L0 \leq 10\%$ | Method111/UL94 | AEC-Q200 | 15 |
| 17 | Random Vibration | (1) No case deformation or change in appearance. (2) $ \Delta L0/L0 \leq 10\%$ | Three Times reflow pretreatment (reflow TMAX265 + 5 -0) vibration plate: “8 x 5” Printed Circuit Board, 0.031” thick, with 7 fixed points on the long side and 2 fixed points on the opposite side of the corner | AEC-Q200 (JESD22-B100) | 30 |
| 18 | Electrical Characterization | According to specification | Parametrically test per lot and sample size requirements, summary to show Min, Max, Mean and Standard deviation at room as well as Min and Max operating temperatures. | AEC-Q200 (User Spec.) | 77 |

*All above experiments items need 3 Lot., sample size is as specified in the table above.

*Sample size standard is from AEC-Q200 : qualification sample size requirements.

7. Recommended Soldering Conditions

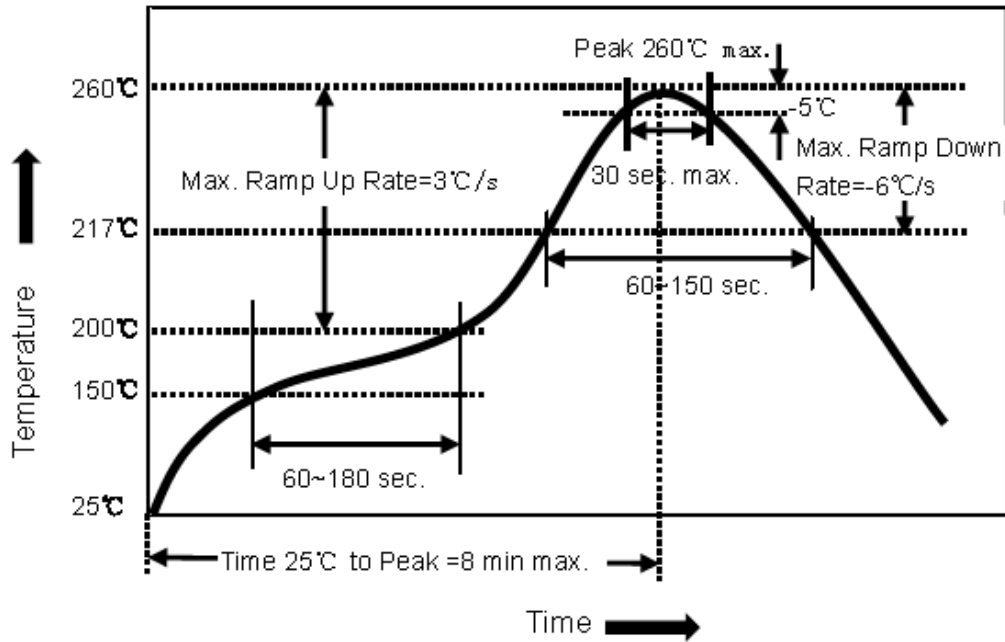(1) Reflow soldering conditions



*Above reflow soldering curve is from J-STD-020D.


(2) Iron soldering

The following conditions must be strictly followed when using a soldering iron.

| | |
|-----------------------|----------------|
| Pre-heating | 150°C 1 minute |
| Tip temperature | 350°C max |
| Soldering iron output | 30w max |
| End of soldering iron | φ 1mm max |
| Soldering time | 3 seconds max |


8. Packaging

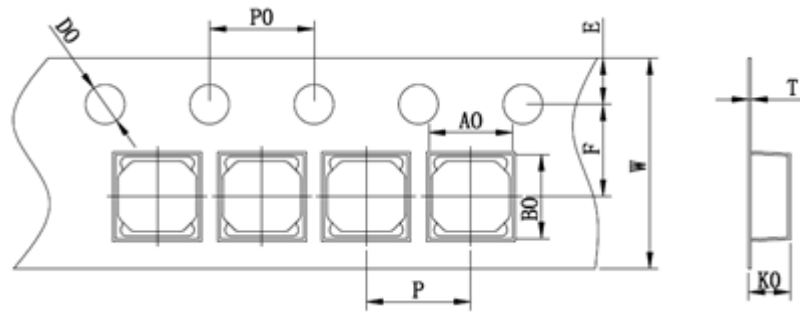(1) Dimension of tape (Unit: mm)




| W | A0 | B0 | K0 | E | F | P | P0 | D0 | T |
|---------|----------|----------|----------|----------|----------|---------|---------|--------------|-----------|
| 8.0±0.3 | 3.30±0.1 | 3.30±0.1 | 1.60±0.1 | 1.75±0.1 | 3.5±0.05 | 4.0±0.1 | 4.0±0.1 | 1.5+0.1/-0.0 | 0.18±0.03 |

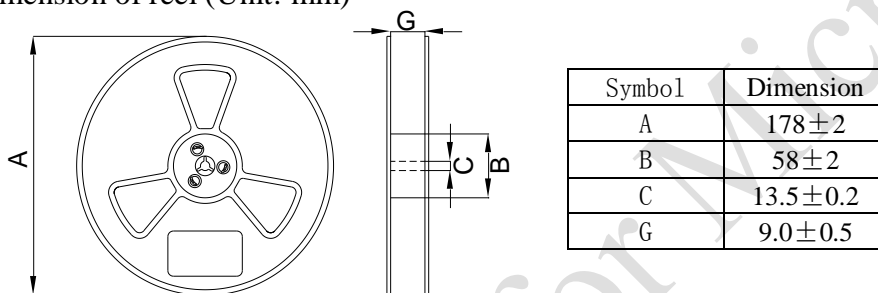(2) Dimension of reel (Unit: mm)



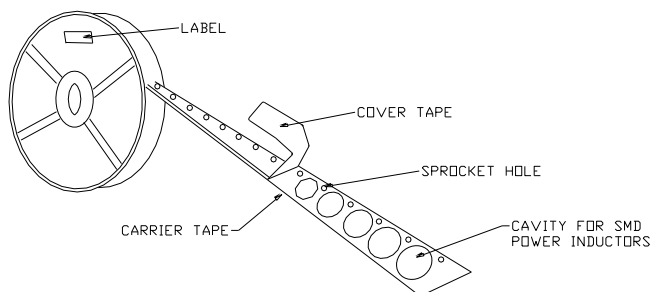(3) Taping figure and drawing direction




(4) Packaging quantities: 2000PCS/Reel.

(5) Peeling strength of cover tape:

The peel force of top cover tape shall be between 0.1N to 1.0 N.

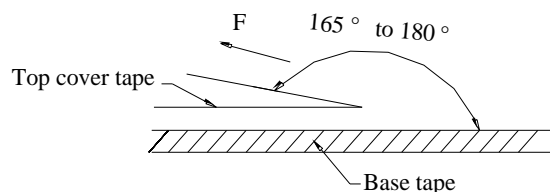*the peel force standard is from EIA-481-D







| Room Temp. (°C) | Room Humidity (%) | Room aim (hpa) | Peel Speed mm/min |
|-----------------|-------------------|----------------|-------------------|
| 5-35 | 45-85 | 860-1060 | 300 |

SHENZHEN MICROGATE TECHNOLOGY CO., LTD.

Add: Microgate Smart Park, Technology Road, Zhukeng Community, Longtian Street, Pingshan District, Shenzhen.

Tel: +86-755-28085000 Fax: +86-755-28085605 Postcode: 518122

9. Visual inspection standard of product

| No. | Defect Item | Graphic | Rejection identification | Acceptance |
|-----|---------------|--|---|------------|
| 1 | Core defect |  | $l > L/6$ or $w > W/6$, NG. | AQL=0.65 |
| 2 | Missing resin |  | The area of missing resin more than single face, NG | AQL=0.65 |
| 3 | Cold solder |  | L more than 1 mm, NG. | AQL=0.65 |
| 4 | Solder uneven |  | $H > 0.1\text{mm}$. NG. | AQL=0.65 |

10. Products Storage

(1) Storage period

Products which inspected in MICROGATE over 12 months ago should be examined and used, which can be confirmed with inspection No. marked on the container. Solderability should be checked if this period is exceeded.

(2) Storage conditions

Products should be storage in the warehouse on the following conditions:

Temperature: $-10 \sim +35^{\circ}\text{C}$

Humidity: Less than 70% relative and humidity

No rapid change on temperature and humidity.

(3) Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.

(4) Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.

(5) Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.

(6) Products should be storage under the airtight packaged condition.

SHENZHEN MICROGATE TECHNOLOGY CO., LTD.

Add: Microgate Smart Park, Technology Road, Zhukeng Community, Longtian Street, Pingshan District, Shenzhen.

Tel: +86-755-28085000 Fax: +86-755-28085605 Postcode: 518122

11/11